


# Frameless Finish in Brick Veneer

FIRE BY **escea.**

lining. Combustible and heat sensitive wall linings or finishes must not protrude past the trim, to the glass viewing area.  
Some scenarios will require the use of an Extended Trim Kit, or a custom solution, to provide adequate protection.

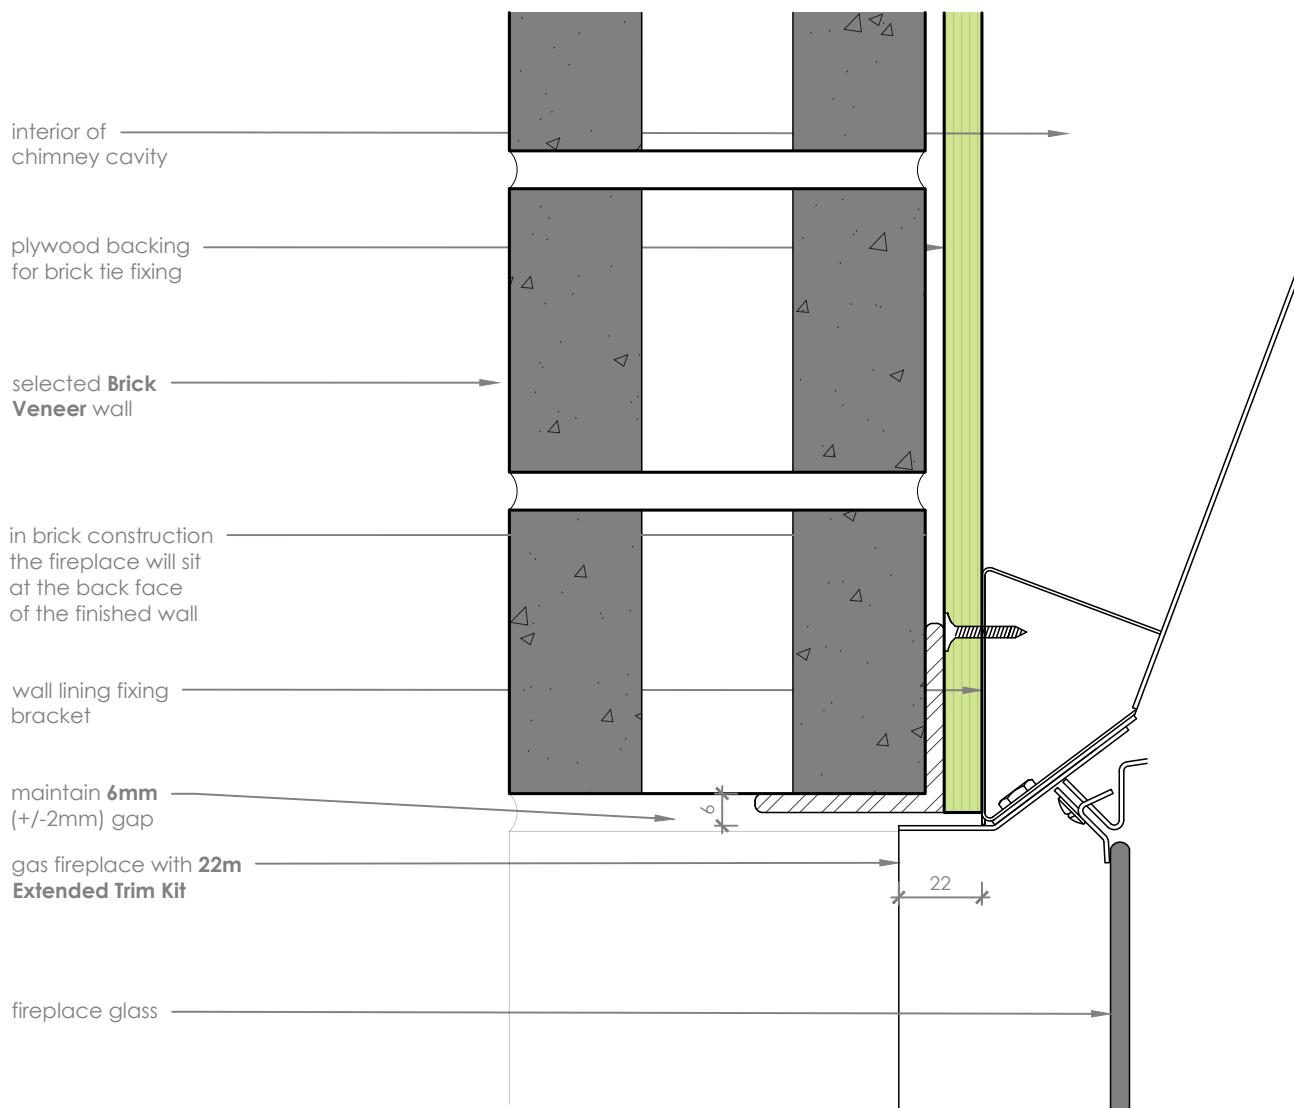

**Brick Veneer Detail**

scale 1:2

## Notes:

- All dimensions are in mm. DO NOT SCALE OFF THESE DRAWINGS
- This detail is to assist in the installation of a **frameless finish** to a DS, DN or KB Series Gas Fireplace.
- This detail is applicable for all for sides of the fireplace glass viewing area.
- Escea recommends when using these finishing methods that a **10-12mm substrate** is used.
- Black fireplace trim must be able to be removed - ensure any adhesive or mortar is kept clear.
- This technical sheet must be read in conjunction with the requisite Escea or MODE Installation Manual, the latest version can be found on our website at [www.escea.com](http://www.escea.com) or [www.stokefires.com](http://www.stokefires.com)

GENERAL CONSTRUCTION AND FINISHES SHOWN INDICATIVE ONLY

Contact the ESCEA Architectural Advisory Team for assistance with the specification of this fire - [aa@escea.com](mailto:aa@escea.com)