


Some design scenarios may expose materials to 80° C or above. Unprotected exposure to heat may be detrimental to the appearance or long term performance of a material. Specifier's and installers must ensure that materials used are suitable for the intended project.

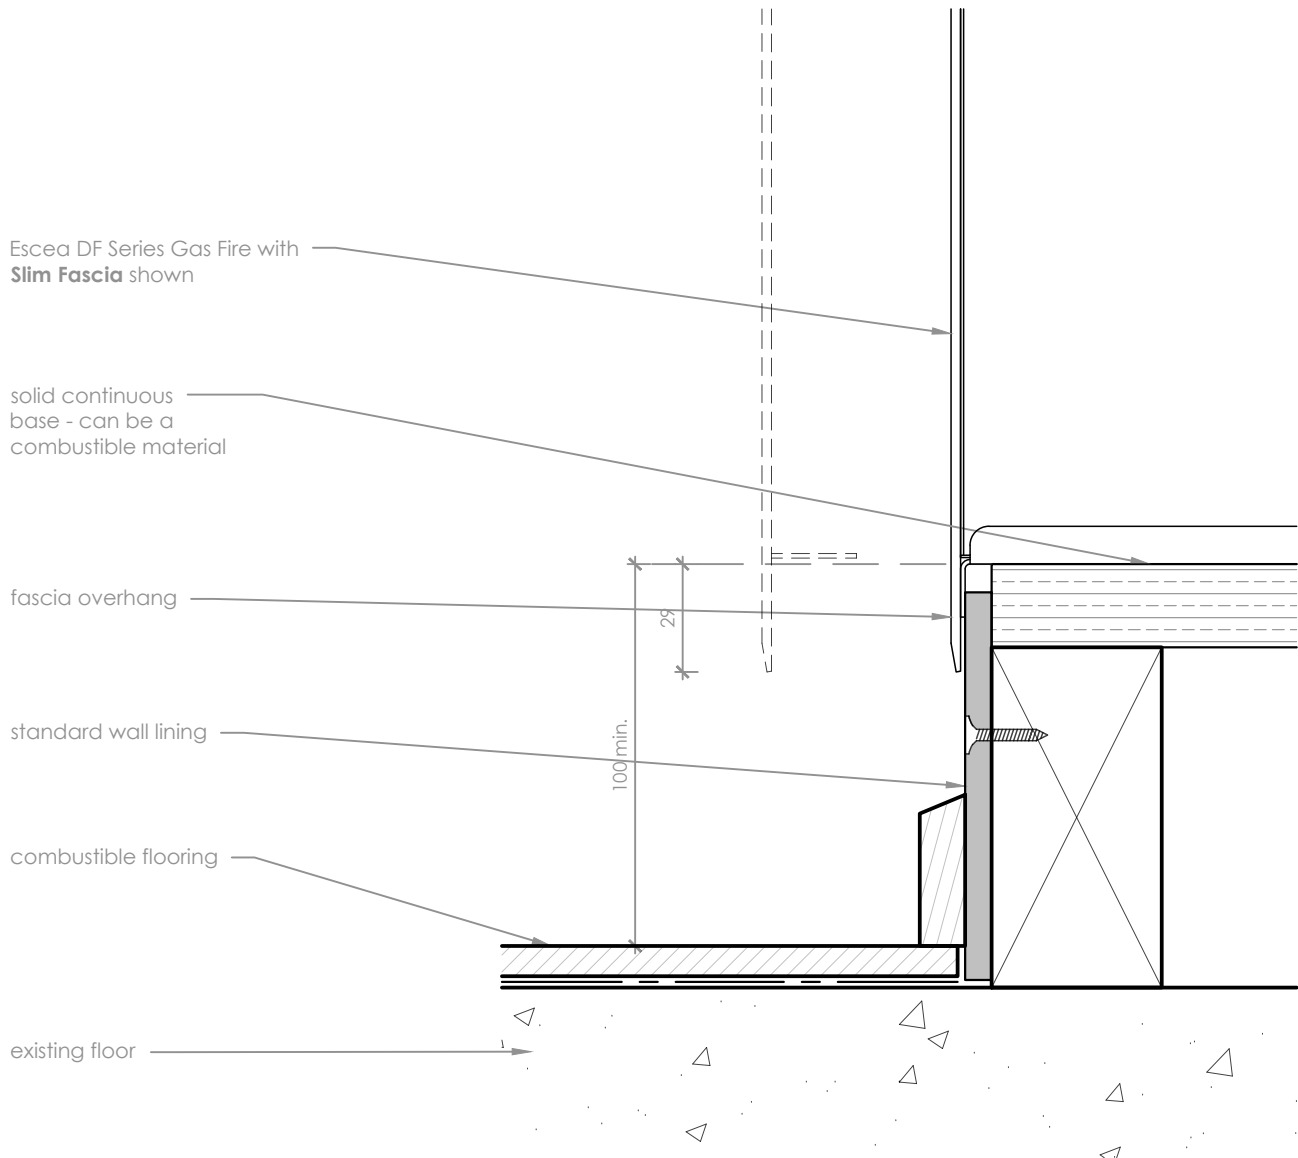

## Combustible Floor Detail

scale 1:2


### Notes:

- All dimensions are in mm.
- This detail is to assist in the installation of a DF700, DF960 or DF990 Gas Fireplace with a **combustible or heat sensitive floor or finish** in front of the fireplace.
- Powdercoated fascia's can be easily damaged - handle with care.
- Give consideration to the overhang of the fascia when setting up the fire - base of the appliance must be at least 30mm above the any adjacent horizontal non-combustible and heat resistant surface.
- This technical sheet must be read in conjunction with the Escea DF Series Installation Manual, the latest version can be found on our website at [www.escea.com](http://www.escea.com).

GENERAL CONSTRUCTION AND FINISHES SHOWN INDICATIVE ONLY

Contact the ESCEA Architectural Advisory Team for assistance with the specification of this fire - [aa@escea.com](mailto:aa@escea.com)

Some design scenarios may expose materials to 80° C or above. Unprotected exposure to heat may be detrimental to the appearance or long term performance of a material. Specifier's and installers must ensure that materials used are suitable for the intended project.

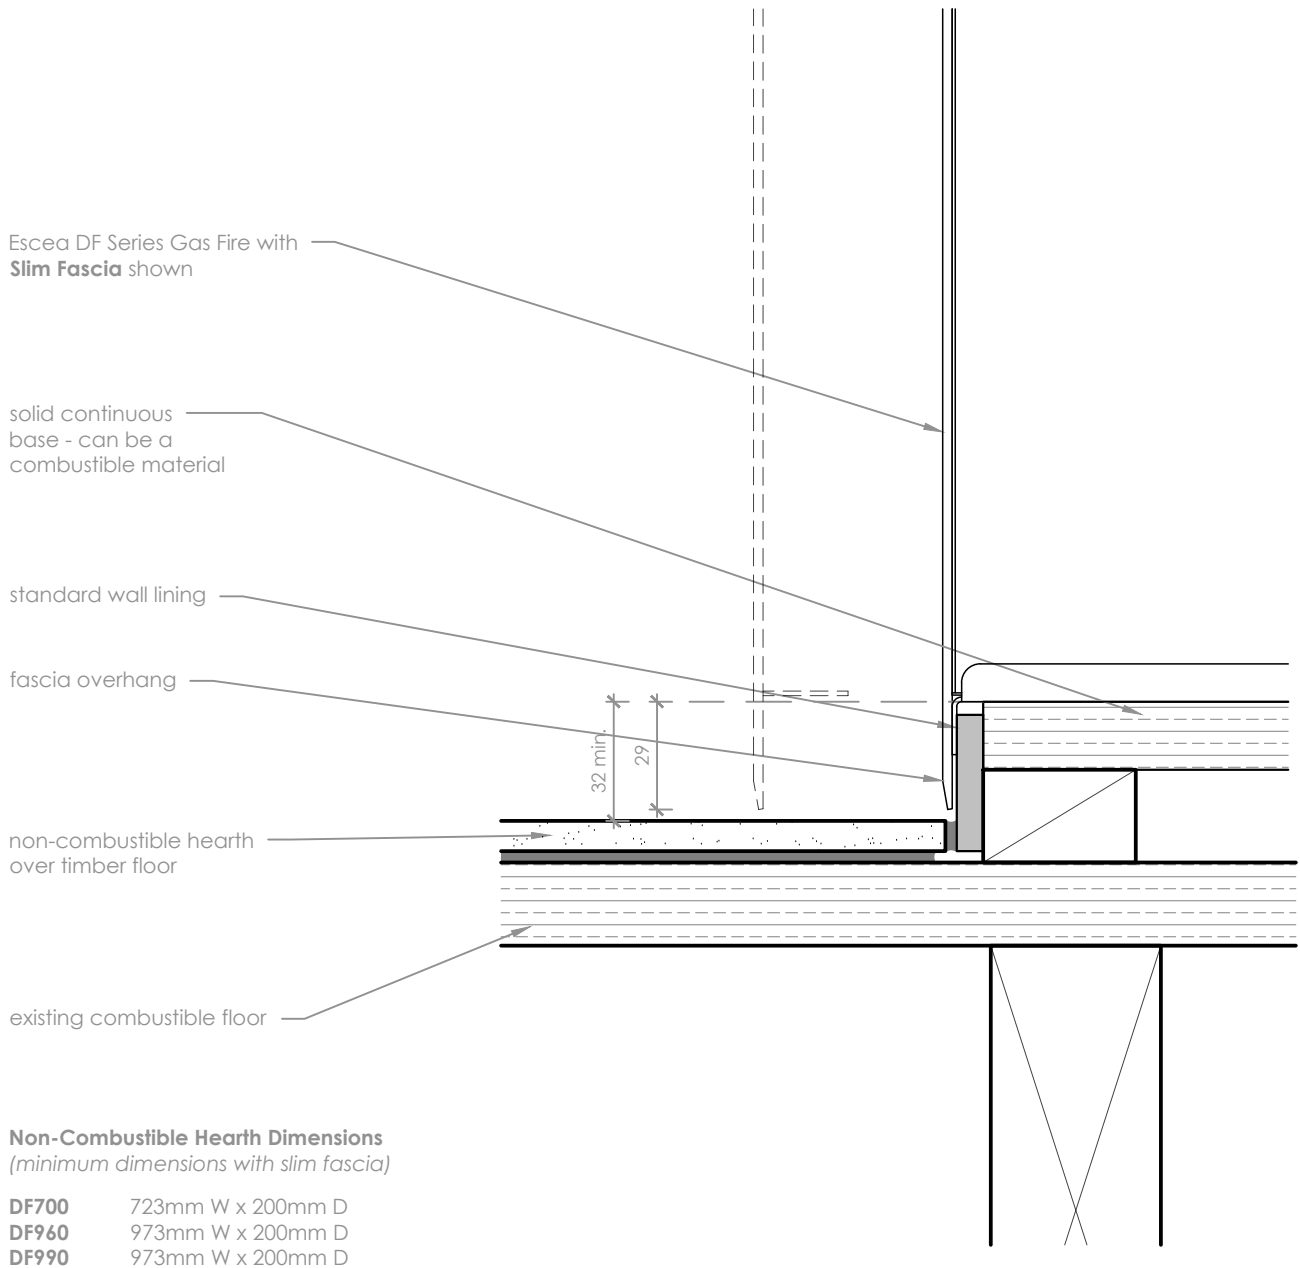

## Combustible Floor Detail

scale 1:2

### Notes:

- All dimensions are in mm.
- This detail is to assist in the installation of a DF700, DF960 or DF990 Gas Fireplace with a **combustible or heat sensitive floor or finish** in front of the fireplace.
- In this scenario a non-combustible hearth is required when the base of the fire is within 100mm from a combustable floor. the hearth needs to be 200mm deep and as wide as the appliance.
- Powdercoated fascia's can be easily damaged - handle with care.
- Give consideration to the overhang of the fascia when setting up the fire - base of the appliance must be at least 30mm above the any adjacent horizontal non-combustible and heat resistant surface.
- This technical sheet must be read in conjunction with the Escea DF Series Installation Manual, the latest version can be found on our website at [www.escea.com](http://www.escea.com).

GENERAL CONSTRUCTION AND FINISHES SHOWN INDICATIVE ONLY

Contact the ESCEA Architectural Advisory Team for assistance with the specification of this fire - [aa@escea.com](mailto:aa@escea.com)