


In a four sided concrete or masonry cavity, installation of the fireplace cannot be completed through the cavity opening. Please allow for installation of the fireplace either prior to, or after the concrete has been cast or laid.

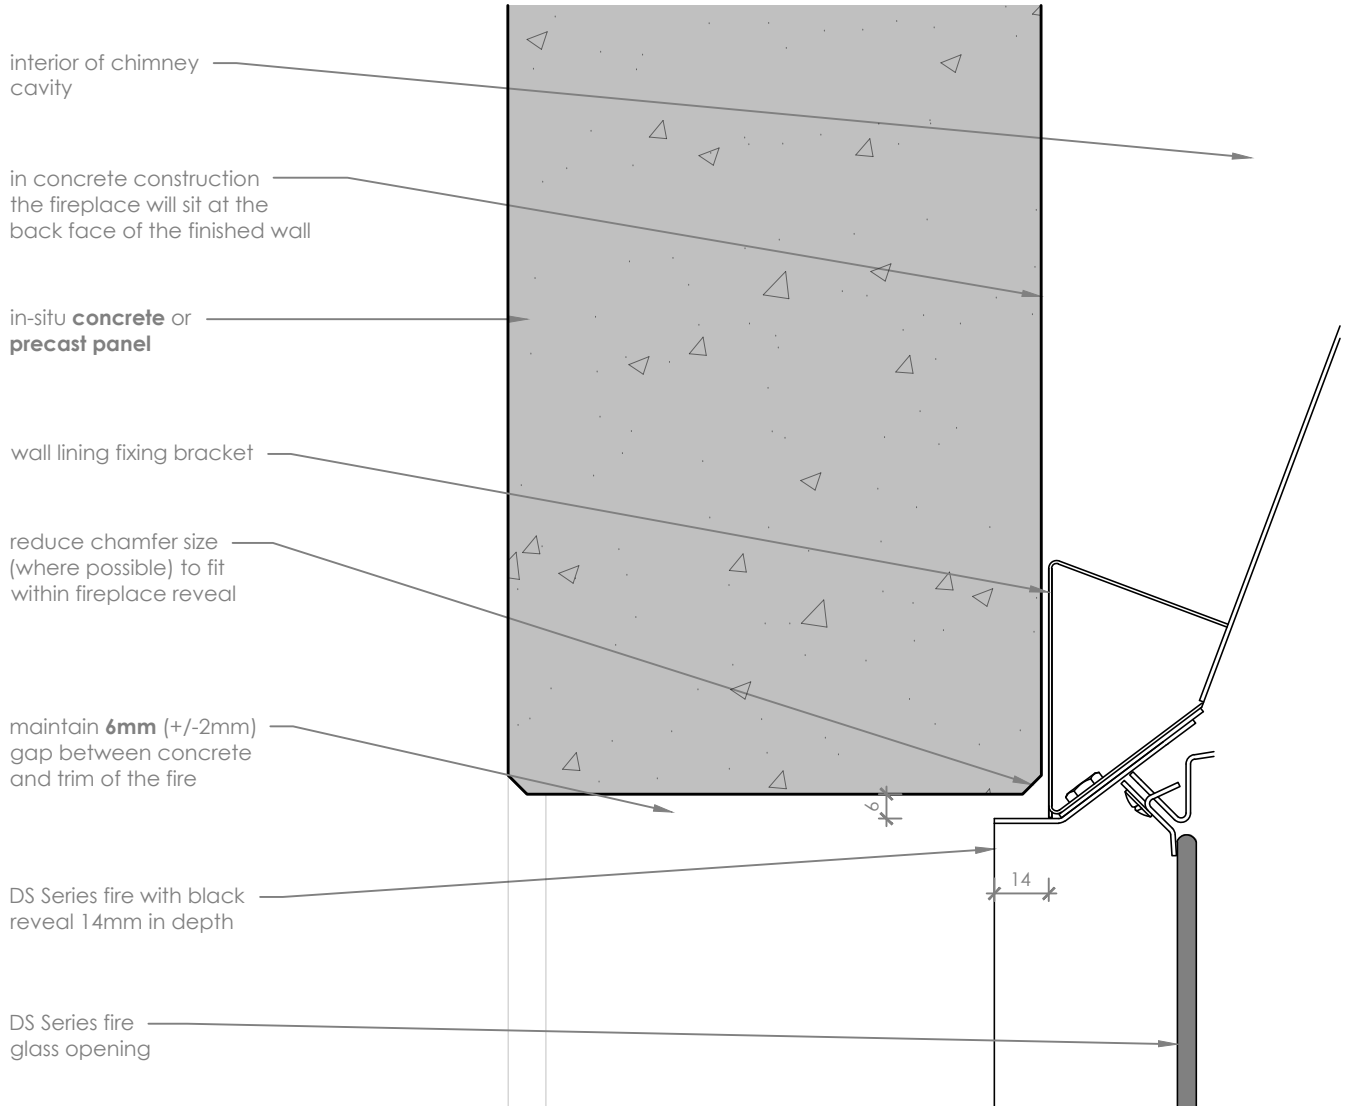

Concrete Detail

scale 1:2

Notes:

- All dimensions are in mm. DO NOT SCALE OFF THESE DRAWINGS
- This detail is to assist in the installation of a **frameless finish** to a DS1150, DS1400, DS1650 or DS1900 Gas Fireplace.
- This detail is suitable for all four sides of the fireplace glass viewing area.
- Use care at installation to avoid damaging powdercoated black fireplace reveals.
- Black fireplace reveals must be able to be removed - ensure any adhesive or mortar is kept clear.
- Allow for construction tolerance when setting out the opening within the precast/in-situ concrete wall.
- This technical sheet must be read in conjunction with the Escea DS Series Installation Manual, the latest version can be found on our website at www.escea.com.

GENERAL CONSTRUCTION AND FINISHES SHOWN INDICATIVE ONLY

Contact the **ESCEA Architectural Advisory Team** for assistance with the specification of this fire - aa@escea.com