
External Vertical Powerflue - Cylinder Flue Detail FIRE BY CSCCC



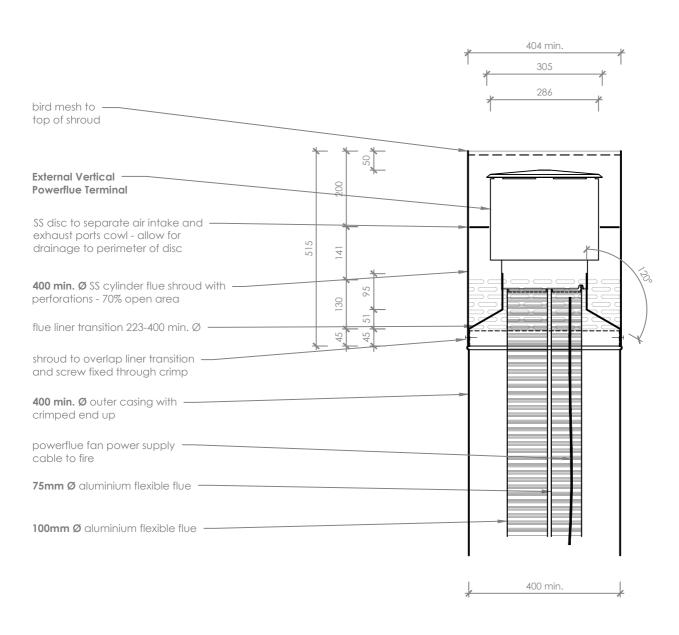

Flue Detail scale 1:10

note:

- DO NOT SCALE OFF THESE DRAWINGS. All dimensions are in mm.
- The External Vertical Powerflue should be used in situations where roof access for servicing the Powerflue Fan is more suitable.
- It is advisable to secure the flexible flue to prevent movement, vibration and sagging this will also assist in maintaining the required 50mm standoff where required.
- Outer shroud MUST be removable to access the flue terminal.
- Construction requirements including venting, moisture control and insulation shown for illustrative purposes only. Confirm specific regulatory requirements.
- The flue terminal will get very hot when in use. Precautions should be taken to protect people and animals from injury.
- This technical sheet must be read in conjunction with the relevant Escea Gas Fireplace Installation Manual, the latest version can be found on our website at www.escea.com.

GENERAL CONSTRUCTION AND FINISHES SHOWN INDICATIVE ONLY

Contact the ESCEA Architectural Advisory Team for assistance with the specification of this fire - aa@escea.com

Flue_Install_Details.dwg 30.06.2023